


DROP AKSH FTTH-SM 01F FLAT C/PORTANTE ACERO

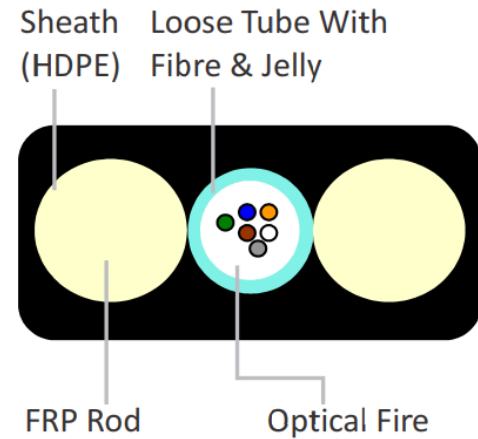

El tubo suelto que contiene las fibras y el gel (Jelly) está protegido por dos varillas FRP y enfundado con HDPE resistente a la intemperie.

CARACTERISTICAS

| FIBRE COUNT | DIAMETER (mm) NOMINAL | | WEIGHT (kg / km) NOMINAL | TENSILE STRENGTH (N) | | CRUSH RESISTANCE (N / 10cm) | BENDING RADIUS (mm) | |
|-------------|-----------------------|--------|--------------------------|---------------------------|-----------------------|-----------------------------|-----------------------------------|----------------------------------|
| | Width | Height | | Installation (Short Term) | Operating (Long Term) | | Temporary (10xD of Cable) Dynamic | Permanent (20xD of Cable) Static |
| Up to 12 | 7.2 | 3.5 | 32 | 1200 | 600 | 2000 | 100 | 200 |